


Double-row ball slewing bearing External geared

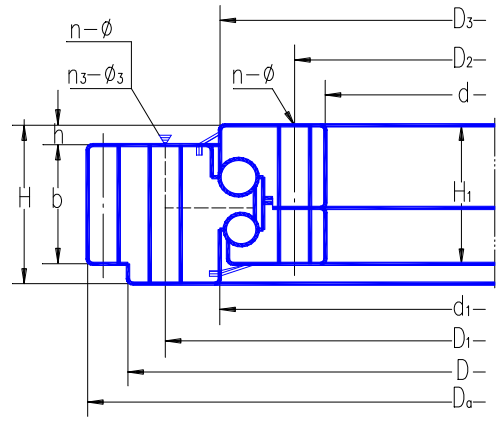

外齿式 external geared	外形尺寸 Boundary dimensions			安装孔尺寸 Bolt hole diameter				结构尺寸 Structure dimensions					齿轮参数 Gear parameters				Basic load rating Coa 10 ⁴ N	质量 Mass kg		
	D	d	H	D1	D2	n	φ	D3	d1	H1	h	n3	φ3	m	Da	Z			b	x
	mm			mm			mm	mm						mm		mm				
021-25-500.**	616	384	106	580	420	20	18	523	518	96	26	4	M10×1	5	645	126	60	0.5	121	100
022-25-500.**	616	384	106	580	420	20	18	523	518	96	26	4	M10×1	6	648	105	60	0.5	121	100
021-25-560.**	676	444	106	640	480	20	18	583	577	96	26	4	M10×1	5	705	138	60	0.5	134	115
022-25-560.**	676	444	106	640	480	20	18	583	577	96	26	4	M10×1	6	708	115	60	0.5	134	115
021-25-630.**	746	514	106	710	550	24	18	653	647	96	26	4	M10×1	6	792	129	60	0.5	153	130
022-25-630.**	746	514	106	710	550	24	18	653	647	96	26	4	M10×1	8	792	96	60	0.5	153	130
021-25-710.**	826	594	106	790	630	24	18	733	728	96	26	4	M10×1	6	864	141	60	0.5	173	140
022-25-710.**	826	594	106	790	630	24	18	733	728	96	26	4	M10×1	8	864	105	60	0.5	173	140
021-30-800.**	942	658	124	898	702	30	22	829	823	114	29	6	M10×1	8	984	120	80	0.5	230	200
022-30-800.**	942	658	124	898	702	30	22	829	823	114	29	6	M10×1	10	990	96	80	0.5	230	200
021-30-900.**	1042	758	124	998	802	30	22	929	923	114	29	6	M10×1	8	1088	133	80	0.5	258	250
022-30-900.**	1042	758	124	998	802	30	22	929	923	114	29	6	M10×1	10	1090	106	80	0.5	258	250
021-30-1000.**	1142	858	124	1098	902	36	22	1029	1023	114	29	6	M10×1	10	1200	117	80	0.5	286	300
022-30-1000.**	1142	858	124	1098	902	36	22	1029	1023	114	29	6	M10×1	12	1200	97	80	0.5	286	300
021-30-1120.**	1262	978	124	1218	1022	36	22	1148	1143	114	29	6	M10×1	10	1320	129	80	0.5	321	340
022-30-1120.**	1262	978	124	1218	1022	36	22	1148	1143	114	29	6	M10×1	12	1320	107	80	0.5	321	340
021-40-1250.**	1426	1074	160	1374	1126	40	26	1286	1282	150	39	6	M10×1	12	1500	122	90	0.5	482	580
022-40-1250.**	1426	1074	160	1374	1126	40	26	1286	1282	150	39	6	M10×1	14	1498	104	90	0.5	482	580
021-40-1400.**	1576	1224	160	1524	1272	40	26	1436	1432	150	39	6	M10×1	12	1644	134	90	0.5	543	650
022-40-1400.**	1576	1224	160	1524	1272	40	26	1436	1432	150	39	6	M10×1	14	1652	115	90	0.5	543	650
021-40-1600.**	1776	1424	160	1724	1476	45	26	1636	1632	150	39	8	M10×1	14	1848	129	90	0.5	620	750
022-40-1600.**	1776	1424	160	1724	1476	45	26	1636	1632	150	39	8	M10×1	16	1856	113	90	0.5	620	750
021-40-1800.**	1976	1624	160	1924	1676	45	26	1836	1832	150	39	8	M10×1	14	2058	144	90	0.5	692	820
022-40-1800.**	1976	1624	160	1924	1676	45	26	1836	1832	150	39	8	M10×1	16	2064	126	90	0.5	692	820
021-50-2000.**	2215	1785	190	2149	1851	48	33	2038	2032	178	47	8	M10×1	16	2304	141	120	0.5	987	1150
022-50-2000.**	2215	1785	190	2149	1851	48	33	2038	2032	178	47	8	M10×1	18	2304	125	120	0.5	987	1150
021-50-2240.**	2455	2025	190	2389	2091	48	33	2278	2272	178	47	8	M10×1	16	2544	156	120	0.5	1110	1500
022-50-2240.**	2455	2025	190	2389	2091	48	33	2278	2272	178	47	8	M10×1	18	2556	139	120	0.5	1110	1500
021-50-2500.**	2715	2285	190	2649	2351	56	33	2538	2532	178	47	8	M10×1	18	2804	153	120	0.5	1110	1500
022-50-2500.**	2715	2285	190	2649	2351	56	33	2538	2532	178	47	8	M10×1	20	2820	138	120	0.5	1110	1500
021-50-2800.**	3015	2585	190	2949	2651	56	33	2838	2832	178	47	8	M10×1	18	3114	170	120	0.5	1390	1900
022-50-2800.**	3015	2585	190	2949	2651	56	33	2838	2832	178	47	8	M10×1	20	3120	153	120	0.5	1390	1900
021-60-3150.**	3428	2872	226	3338	2962	56	45	3198	3192	214	56	8	M10×1	20	3540	174	150	0.5	1870	3300
022-60-3150.**	3428	2872	226	3338	2962	56	45	3198	3192	214	56	8	M10×1	22	3542	158	150	0.5	1870	3300
021-60-3550.**	3828	3272	226	3738	3362	56	45	3598	3592	214	56	8	M10×1	20	3940	194	150	0.5	2110	3700
022-60-3550.**	3828	3272	226	3738	3362	56	45	3598	3592	214	56	8	M10×1	22	3938	176	150	0.5	2110	3700
021-60-4000.**	4278	3722	226	4188	3812	60	45	4048	4042	214	56	10	M10×1	22	4400	197	150	0.5	2370	4200
022-60-4000.**	4278	3722	226	4188	3812	60	45	4048	4042	214	56	10	M10×1	25	4400	173	150	0.5	2370	4200
021-60-4500.**	4778	4222	226	4688	4312	60	45	4548	4542	214	56	10	M10×1	22	4884	219	150	0.5	2670	4700
022-60-4500.**	4778	4222	226	4688	4312	60	45	4548	4542	214	56	10	M10×1	25	4900	193	150	0.5	2670	4700