


Double-row ball slewing bearing Ung geared

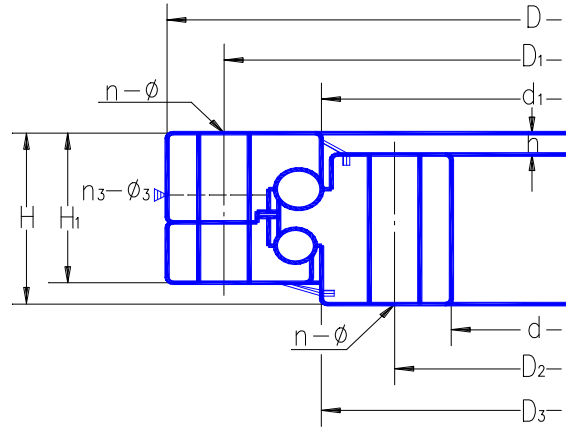

无齿式 Ung geared	外形尺寸 Boundary dimensions			安装孔尺寸 Bolt hole diameter				结构尺寸 Structure dimensions						Basic load ratings Coa 10 ⁴ N	质量 Mass kg
	D	d	H	D1	D2	n	ϕ	D3	d1	H1	h	n3	ϕ_3		
	mm			mm				mm							
020-25-500.**	616	384	106	580	420	20	18	523	518	96	26	4	M10×1	121	100
	616	384	106	580	420	20	18	523	518	96	26	4	M10×1	121	100
020-25-560.**	676	444	106	640	480	20	18	583	577	96	26	4	M10×1	134	115
	676	444	106	640	480	20	18	583	577	96	26	4	M10×1	134	115
020-25-630.**	746	514	106	710	550	24	18	653	647	96	26	4	M10×1	153	130
	746	514	106	710	550	24	18	653	647	96	26	4	M10×1	153	130
020-25-710.**	826	594	106	790	630	24	18	733	728	96	26	4	M10×1	173	140
	826	594	106	790	630	24	18	733	728	96	26	4	M10×1	173	140
020-30-800.**	942	658	124	898	702	30	22	829	823	114	29	6	M10×1	230	200
	942	658	124	898	702	30	22	829	823	114	29	6	M10×1	230	200
020-30-900.**	1042	758	124	998	802	30	22	929	923	114	29	6	M10×1	258	250
	1042	758	124	998	802	30	22	929	923	114	29	6	M10×1	258	250
020-30-1000.**	1142	858	124	1098	902	36	22	1029	1023	114	29	6	M10×1	286	300
	1142	858	124	1098	902	36	22	1029	1023	114	29	6	M10×1	286	300
020-30-1120.**	1262	978	124	1218	1022	36	22	1148	1143	114	29	6	M10×1	321	340
	1262	978	124	1218	1022	36	22	1148	1143	114	29	6	M10×1	321	340
020-40-1250.**	1426	1074	160	1374	1126	40	26	1286	1282	150	39	6	M10×1	482	580
	1426	1074	160	1374	1126	40	26	1286	1282	150	39	6	M10×1	482	580
020-40-1400.**	1576	1224	160	1524	1272	40	26	1436	1432	150	39	6	M10×1	543	650
	1576	1224	160	1524	1272	40	26	1436	1432	150	39	6	M10×1	543	650
020-40-1600.**	1776	1424	160	1724	1476	45	26	1636	1632	150	39	8	M10×1	620	750
	1776	1424	160	1724	1476	45	26	1636	1632	150	39	8	M10×1	620	750
020-40-1800.**	1976	1624	160	1924	1676	45	26	1836	1832	150	39	8	M10×1	692	820
	1976	1624	160	1924	1676	45	26	1836	1832	150	39	8	M10×1	692	820
020-50-2000.**	2215	1785	190	2149	1851	48	33	2038	2032	178	47	8	M10×1	987	1150
	2215	1785	190	2149	1851	48	33	2038	2032	178	47	8	M10×1	987	1150
020-50-2240.**	2455	2025	190	2389	2091	48	33	2278	2272	178	47	8	M10×1	1110	1500
	2455	2025	190	2389	2091	48	33	2278	2272	178	47	8	M10×1	1110	1500
020-50-2500.**	2715	2285	190	2649	2351	56	33	2538	2532	178	47	8	M10×1	1110	1500
	2715	2285	190	2649	2351	56	33	2538	2532	178	47	8	M10×1	1110	1500
020-50-2800.**	3015	2585	190	2949	2651	56	33	2838	2832	178	47	8	M10×1	1390	1900
	3015	2585	190	2949	2651	56	33	2838	2832	178	47	8	M10×1	1390	1900
020-60-3150.**	3428	2872	226	3338	2962	56	45	3198	3192	214	56	8	M10×1	1870	3300
	3428	2872	226	3338	2962	56	45	3198	3192	214	56	8	M10×1	1870	3300
020-60-3550.**	3828	3272	226	3738	3362	56	45	3598	3592	214	56	8	M10×1	2110	3700
	3828	3272	226	3738	3362	56	45	3598	3592	214	56	8	M10×1	2110	3700
020-60-4000.**	4278	3722	226	4188	3812	60	45	4048	4042	214	56	10	M10×1	2370	4200
	4278	3722	226	4188	3812	60	45	4048	4042	214	56	10	M10×1	2370	4200
020-60-4500.**	4778	4222	226	4688	4312	60	45	4548	4542	214	56	10	M10×1	2670	4700
	4778	4222	226	4688	4312	60	45	4548	4542	214	56	10	M10×1	2670	4700