


# Three-row Roller Slewing Bearing Ung geared

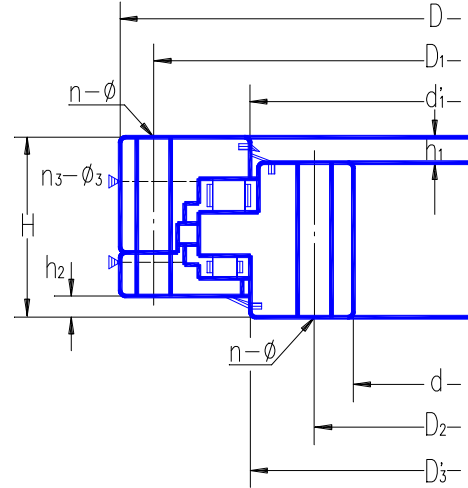

Ung geared	Boundary dimensions			Mounting diameter				Structure dimensions						Basic load ratings		Weight kg
	D	d	H	D1	D2	n	φ	D3	d1	h1	h2	n3	φ3	Coa	Cor	
	mm			mm				mm						10 <sup>4</sup> N		
130·25·500·**	634	366	148	598	402	24	18	474	463	32	10	4×2	M10×1	275	35.5	224
130·25·560·**	694	426	148	658	462	24	18	534	523	32	10	4×2	M10×1	308	39.9	240
130·25·630·**	764	496	148	728	532	28	18	604	673	32	10	4×2	M10×1	345	45.1	270
130·25·710·**	844	576	148	808	612	28	18	684	673	32	10	4×2	M10×1	388	51.7	300
130·32·800·**	964	636	182	920	680	36	22	770	759	40	10	4×2	M10×1	549	71.2	500
130·32·900·**	1064	736	182	1020	780	36	22	870	859	40	10	4×2	M10×1	619	80.8	600
130·32·1000·**	1164	836	182	1120	880	40	22	970	959	40	10	5×2	M10×1	689	90.3	680
130·32·1120·**	1284	956	182	1240	1000	40	22	1090	1079	40	10	5×2	M10×1	768	102	820
130·40·1250·**	1445	1055	220	1393	1107	45	26	1213	1200	50	10	5×2	M10×1	1110	146	1200
130·40·1400·**	1595	1205	220	1543	1257	45	26	1363	1350	50	10	5×2	M10×1	1240	165	1300
130·40·1600·**	1795	1405	220	1743	1457	48	26	1563	1550	50	10	6×2	M10×1	1420	190	1520
130·40·1800·**	1995	1605	220	1943	1657	48	26	1763	1750	50	10	6×2	M10×1	1590	215	1750
130·45·2000·**	2195	1816	150	2127	1885	60	33	1967	1945	54	12	6×2	M10×1	2050	239	2400
130·45·2240·**	2461	2019	231	2395	2085	60	33	2207	2185	54	12	6×2	M10×1	2310	268	2700
130·45·2500·**	2721	2279	231	2655	2345	72	33	2467	2445	54	12	8×3	M10×1	2580	302	3000
130·45·2800·**	3021	2579	231	2955	2645	72	33	2767	2745	54	12	8×2	M10×1	2880	339	3400
130·50·3150·**	3432	2868	270	3342	2958	72	45	3104	3090	65	12	8×2	M10×1	3590	381	5000
130·50·3550·**	3832	3268	270	3742	3358	72	45	3504	3490	65	12	8×2	M10×1	4040	431	5600
130·50·4000·**	4282	3718	270	4192	3808	80	45	3954	3940	65	12	8×2	M10×1	4560	487	6400
130·50·4500·**	4782	4218	270	4692	4308	80	45	4454	4440	65	12	8×2	M10×1	5445	580	6942
130·50·5000·**	5282	4718	270	5192	4808	80	45	4954	4937	65	12	12×3	M10×1	6050	644	7714