




# Jre-series-crossed-roller-bearing

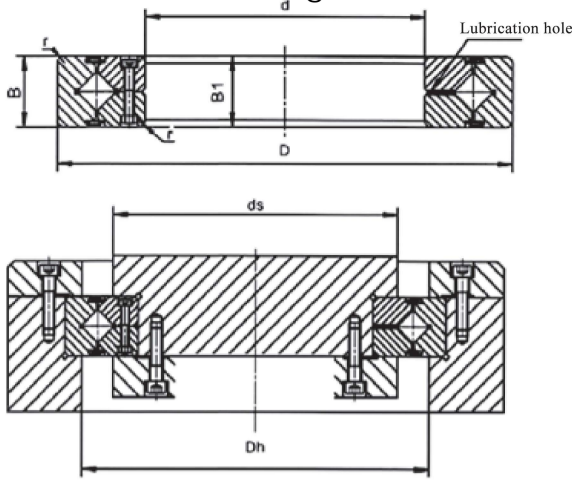

JRE



JRE...UU

Integral outer ring, separate inner ring

( Unit ) : mm

Model	Dimensions						Basic rated load ( kN )		Weight	Corresponding model
	Inner ring	Outer ring	Width	Pitch diameter	Shoulder height		Radial direction			
	d	D	B	Dpw	ds	Dh	C	Co	Kg	THK
JRE 2008	20	36	8	29	23.5	30.5	3.23	3.1	0.04	RE 2008
JRE 2508	25	41	8	34	28.5	35.5	3.63	3.83	0.05	RE 2508
JRE 3010	30	55	10	43.5	37	47	7.35	8.36	0.12	RE 3010
JRE 3510	35	60	10	48.5	41	51.5	7.64	9.12	0.13	RE 3510
JRE 4010	40	65	10	53.5	47.5	58	8.33	10.6	0.16	RE 4010
JRE 4510	45	70	10	58.5	51	61.5	8.62	11.3	0.17	RE 4510
JRE 5013	50	80	13	66	57.5	72	16.7	20.9	0.27	RE 5013
JRE 6013	60	90	13	76	68	82	18	24.3	0.3	RE 6013
JRE 7013	70	100	13	86	78	92	19.4	27.7	0.35	RE 7013
JRE 8016	80	120	16	101.4	91	111	30.1	42.1	0.7	RE 8016
JRE 9016	90	130	16	112	98	118	31.4	45.3	0.75	RE 9016
JRE 10016	100	140	16	121.1	109	129	31.7	48.6	0.83	RE 10016
JRE 10020	100	150	20	127	113	133	33.1	50.9	1.45	RE 10020
JRE 11012	110	135	12	123.3	117	127	12.5	24.1	0.4	RE 11012
JRE 11015	110	145	15	129	122	136	23.7	41.5	0.75	RE 11015
JRE 11020	110	160	20	137	120	140	34	54	1.56	RE 11020
JRE 12016	120	150	16	136	127	141	24.2	43.2	0.72	RE 12016
JRE 12025	120	180	25	152	133	164	66.9	100	2.62	RE 12025
JRE 13015	130	160	15	146	137	152	25	46.7	0.72	RE 13015
JRE 13025	130	190	25	162	143	174	69.5	107	2.82	RE 13025
JRE 14016	140	175	16	160	147	162	25.9	50.1	1	RE 14016
JRE 14025	140	200	25	172	154	185	74.8	121	2.96	RE 14025
JRE 15013	150	180	13	166	158	172	27	53.5	0.68	RE 15013
JRE 15025	150	210	25	182	164	194	76.8	128	3.16	RE 15025
JRE 15030	150	230	30	192	173	210	100	156	5.3	RE 15030
JRE 16025	160	220	25	192	173	204	81.7	135	3.14	RE 16025
JRE 17020	170	220	20	196.1	184	198	29	62.1	2.21	RE 17020
JRE 18025	180	240	25	210	195	225	84	143	3.44	RE 18025
JRE 19025	190	240	25	219	202	222	41.7	82.9	2.99	RE 19025
JRE 20025	200	260	25	230	215	245	84.2	157	4	RE 20025
JRE 20030	200	280	30	240	221	258	114	200	6.7	RE 20030
JRE 20035	200	295	35	247.7	225	270	151	252	9.6	RE 20035
JRE 22025	220	280	25	250.1	235	265	92.3	171	4.1	RE 22025
JRE 24025	240	300	25	272.5	256	281	68.3	145	4.5	RE 24025
JRE 25025	250	310	25	280.9	268	293	69.3	150	5	RE 25025
JRE 25030	250	330	30	287.5	269	306	126	244	8.1	RE 25030
JRE 25040	250	355	40	300.7	275	326	195	348	14.8	RE 25040
JRE 30025	300	360	25	332	319	344	76.3	178	5.9	RE 30025
JRE 30035	300	395	35	345	322	368	183	367	13.4	RE 30035
JRE 30040	300	405	40	351.6	326	377	212	409	17.2	RE 30040
JRE 35020	350	400	20	376.6	363	383	54.1	143	3.9	RE 35020
JRE 40035	400	480	35	440.3	422	459	156	370	14.5	RE 40035
JRE 40040	400	510	40	453.4	428	479	241	531	23.5	RE 40040
JRE 45025	450	500	25	476.6	464	484	61.7	182	6.6	RE 45025
JRE 50025	500	550	25	526.6	514	534	65.5	201	7.3	RE 50025
JRE 50040	500	600	40	548.8	526	572	239	607	26	RE 50040
JRE 50050	500	625	50	561.6	536	587	267	653	41.7	RE 50050
JRE 60040	600	700	40	650	627	673	264	721	29	RE 60040